

pubs.acs.org/journal/ascecg Research Article

# From Mining to Mitigation: How Bitcoin Can Support Renewable Energy Development and Climate Action

Published as part of the ACS Sustainable Chemistry & Engineering virtual special issue "Sustainable Energy and CO2 Conversion - Angel Irabien Festschrift".

Apoorv Lal, Jesse Zhu, and Fengqi You\*



Cite This: https://doi.org/10.1021/acssuschemeng.3c05445




**ACCESS** 

Metrics & More

ABSTRACT: The world is currently facing a major issue of high emissions from fossil-fuel-based energy sources, which contribute to the persistent problem of climate change. A switch to a renewable-powered infrastructure is necessary to mitigate this challenge. However, the shift to renewable energy faces obstacles, such as high costs and economic uncertainties. This work proposes mitigation of climate change by investigating the potential for bitcoin mining to serve as a means of utilizing surplus renewable energy from planned installations before grid integration. The study's findings indicate the potential for bitcoin to provide economic benefits as an alternative to grid-powered mining at planned renewable installations across the U.S. states. We show that states like Texas have the maximum potential, with 32 planned renewable installations that could generate

combined profits of \$47M using bitcoin mining during precommercial operation.

KEYWORDS: renewable energy, climate change, blockchain, bitcoin, energy transition, cryptocurrency



Article Recommendations

## ■ INTRODUCTION


On January 3, 2009, Nakamoto introduced bitcoin as a revolutionary new way to facilitate online payments, eradicating the need for third-party financial institutions. Little did the world know at the time that this new technology would significantly transform how people experience payments, monetization, and exchange of tokens. Apart from its role in the financial sector, the past decade has shown that adopting blockchain-based applications can transform different aspects of our lives. As an illustration, in the energy sector, blockchain holds the potential to ensure the privacy and security of energy distribution operations.<sup>2</sup> It would decrease the costs of interconnecting distributed energy resources in the decentralized network paradigm<sup>3</sup> and support the climate actions.4 In the healthcare industry, blockchain technology offers a superior data storage system for vaccination records that would be anonymous, entrenched, and transparent. Blockchain technology can also play a vital role in bolstering food security by assigning unique digital identifiers to food items, enabling precise tracking of their location, condition, and growth stages.<sup>6</sup> It is also considered that blockchain can assist in human rights investigations as it could establish a chain of custody for scientific evidence, which is essential in human rights cases.<sup>7</sup> To appreciate the scale of the

cryptocurrency industry's expansion, it is worth noting that on February 21, 2021, the market capitalization of bitcoin was \$1.08 trillion—a figure that exceeds the gross domestic product (GDP) of several countries, including The Netherlands, Saudi Arabia, Turkey, and Switzerland.<sup>8</sup> Despite recent events that have impacted its market capitalization, it is crucial to recognize the economic potential of an industry that has demonstrated resilience and continues to bounce back after every setback.<sup>9,10</sup> Even with the reduction in miner rewards, every 4 years, <sup>11,19</sup> million bitcoins have already been mined, with more to follow after regular intervals, depicting that blockchain applications like bitcoin have gone from strength to strength.<sup>12</sup> It is a conservative, if not an optimistic, approach to consider how such technology could still shape various aspects of our lives toward a sustainable and climate-friendly future.

While blockchain continues to make strides in various aspects of our society, the world is also facing the critical

Received: August 25, 2023 Revised: September 27, 2023



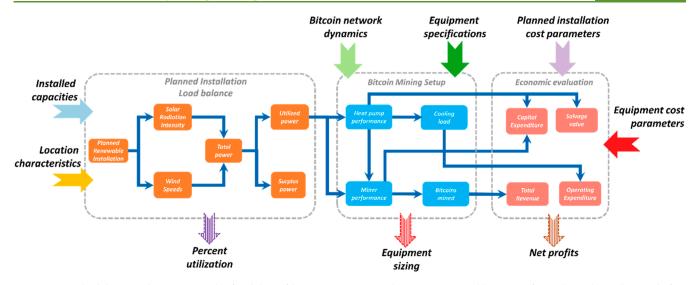

**Figure 1.** Methodology used to examine the feasibility of bitcoin mining to utilize excess renewable energy from planned installations before integrating with the grid. The blue arrows in the inner boxes show the computation steps.

challenge of climate change. Despite the Paris Agreement that brought 196 countries to the table to collectively fight this glooming climate change problem, 13 it is evident that we are falling behind our climate agreement targets which restrict the global temperature rise to 2 °C by 2100, as indicated by previous studies. 14,15 In the fight against climate change, countries such as the U.S., China, and Germany are investing in renewable energy infrastructure to replace conventional power sources.  $^{16-20}$  To reduce carbon emissions and facilitate the transition toward a more sustainable energy matrix, many countries incentivize renewable energy production.<sup>21-23</sup> However, the anticipated growth of renewable energy capacity is hindered by factors such as high capital expenditure and the intermittent nature of renewable energy sources. Moreover, the lack of suitable energy storage options leads to significant renewable energy curtailments. 24 To reduce economic risks for investors and support renewable installations, governments must implement specific policies, incentives, and risk mitigation strategies.<sup>25</sup> Prior to integration with the grid, a given renewable energy installation is capable of producing power below its nameplate capacity yet generates no revenue.

In the past, the growing popularity of blockchain technology, particularly grid-powered cryptocurrencies, such as bitcoin, has had a negative impact on the battle against climate change. Bitcoin mining has been heavily criticized for its exorbitantly high energy consumption and resulting carbon footprint. 26–29 In contrast to criticism that views it as a contributor to global carbon debt, this study examines whether crypto operations such as bitcoin mining can serve as a catalyst to improve the economic competitiveness of planned renewable installations in the U.S. As a result, it can aid in transitioning toward cleaner energy infrastructure and mitigating climate change. We conduct a prospective investigation and analysis to explore the potential of crypto operations to enhance the economic benefits of planned solar and wind installations in various US states.

## METHODS

As illustrated in Figure 1, suitable data sources are essential for assessing the viability of using Bitcoin to extract the added profitability from planned renewable installations during the precommercial operation. The energy produced by wind turbines

relies on the incoming wind velocity and crucial aspects of the turbine, such as the minimum and maximum operational speeds. In the case of solar photovoltaic (PV) systems that transform incoming solar radiation into energy, the total power available at different time intervals depends on the incident radiation, solar panel efficiency, and solar power capacity. The National Renewable Energy Laboratory's System Advisor Model and the Visual Crossing Weather API have been employed to obtain hourly solar radiation intensities and wind speeds, respectively, which are then used to determine the available power from different planned renewable source installations.<sup>30,31</sup> In the crypto industry, a computer designed to address complex mathematical problems in return for a reward in terms of a cryptocurrency is called a miner.<sup>32</sup> In this study, Bitmain Antiminer S19i Pro was the miner considered with its respective hashing power and power consumption.<sup>33</sup> Another vital data source in this work corresponds to the network dynamics associated with bitcoin transactions. These network dynamics mainly consist of bitcoin prices and network difficulty levels acquired from the available mining databases.<sup>34</sup> Other critical input parameters in this work, such as equipment specifications, have been obtained from previous literature.3

The proposed model formulation in this work aims to maximize profitability (profit) using bitcoin mining based on the available power from the planned renewable installations before grid integration. We formulate the following models to maximize the net profit during the operation of the facility for bitcoin mining:

max profit s.t. load balance constraints given in eqs 1–5 operational constraints given in eqs 6–9

economic evaluation constraints given in eqs 10-19

The load balance constraints employ the data for wind speed and solar irradiation for different planned renewable installations considered in the study. The wind or solar power values that are calculated represent the total available power that must be divided between the utilized and surplus power at different time intervals. These constraints also include the distribution of the utilized power between the mining equipment and the auxiliary equipment for the bitcoin mining setup. Operational constraints used in the study govern the equipment performances, including the number of bitcoins mined, energy utilization levels, cooling loads, and so forth. For instance, the cooling load requirement for miners is proportional to the power consumption, which must be removed using auxiliary heat pumps. Similarly, the specified coefficient of performance for heat pumps determines their power consumption. The operational constraints also outline the upper and lower limits of the power assigned to each piece of equipment, considering the number of units

in use and their individual capacities. The economic analysis in the study requires the determination of the income generated over various time periods, the cost of capital investments, operating expenses, and the residual value of the equipment used in the project. The revenue generated from the bitcoin mining process depends on the bitcoin price, the number of bitcoins rewarded on adding a new block, the hash rate, the mining time, and the present network difficulty. Mining difficulty indicates how difficult it is to confirm a transaction in the network and, thus, add a block to the blockchain to get bitcoin as the reward. The capital expenditure is determined by using the unit capital costs and the number of units used in the project life. The operating cost for the process components is estimated by summing the operational and maintenance cost units in different time intervals.<sup>23</sup> Lastly, the double-depreciation method was used to calculate the salvage value for the equipment used.

**Optimization Modeling Framework.** We utilize the data for wind speed and solar irradiation for different planned renewable installations at varying capacities to obtain the total available power. In the case of wind energy systems, the power generated by wind turbines depends on the incident wind speed. Moreover, the wind turbine characteristics are crucial in power generation, including the cut-in and cut-out speed (m/s). In this study, we utilize a piecewise linear equation to estimate the wind turbine output power as a function of incident wind speed, as shown in the equation below<sup>38</sup>

$$\operatorname{Pwind}_{t} = \begin{cases} \operatorname{Pr} & v_{r} < v_{t}^{s} < v_{\operatorname{cout}} \\ \operatorname{Pr} \cdot \frac{v_{t}^{s} - v_{\operatorname{cin}}}{v_{r} - v_{\operatorname{cin}}} & v_{\operatorname{cin}} < v_{t}^{s} < v_{r}, \qquad \forall \ t \in T \\ 0 & \text{otherwise} \end{cases}$$

where  $Pwind_t$  is the wind power output at time interval t, and Tdefines the total time interval for the project life. Pr is the rated output of the wind turbine.  $v_r$ ,  $v_{cin}$ , and  $v_{cout}$  are the rated wind speed and the cut-in and cut-out wind speed, respectively.<sup>40</sup> In the context of wind power generation, the cut-in speed refers to the minimum wind velocity at which the turbine generates power; any wind speed below this threshold lacks the force to rotate the blades. The rated wind speed indicates the point at which the turbine achieves its designated power output capacity. Beyond this speed, the power output remained fairly constant. On the other hand, the cut-out speed is the maximum wind speed for turbine operation to avert potential damages.  $v_t^s$  is the wind speed at any given location for a planned renewable installation at time t. In the case of a solar PV planned installation, which converts solar radiation into power, the total power available at a given time depends on incident radiation, the solar panel efficiency, and the surface area of collector panels. It can be represented as a linear function as shown below<sup>36</sup>

$$Psolar_{t} = \mu^{PV} \cdot rsolar_{t} \cdot S^{PV}, \qquad \forall \ t \in T$$
 (2)

where  $\operatorname{Psolar}_t$  is the output PV power,  $\mu^{\operatorname{PV}}$  is the solar panel efficiency, indicating the proportion of incoming energy that a solar panel can convert into usable electrical energy,  $^{41}$  and  $\operatorname{rsolar}_t$  is the incident solar irradiation. The load balance for the available power  $(P_t^{\operatorname{AVAIL}})$  from a given planned renewable installation which must be distributed among the components of utilized power  $(P_t^{\operatorname{UTL}})$  and surplus power  $(P_t^{\operatorname{Surplus}})$  in different time intervals, can be described using the following equation

$$P_t^{\text{AVAIL}} = P_t^{\text{UTL}} + P_t^{\text{Surplus}} \tag{3}$$

While the load balance for the total power remains the same with two components, i.e., utilized power and surplus power, as described in eq 3, the load balance for the utilized power in bitcoin mining can be described as follows

$$P_t^{\text{UTL}} = P_t^{\text{Miner}} + P_t^{\text{HP}} \tag{4}$$

where  $P_t^{\text{Miner}}$  and  $P_t^{\text{HP}}$  refer to the power dedicated to the bitcoin mining equipment and the auxiliary heat pumps in different time

intervals. Equation 5 calculates the total utilization (UTL) for the available power as shown below

$$UTL = \frac{\sum_{t \in T} P_t^{UTL}}{\sum_{t \in T} P_t^{AVAIL}}$$
(5)

However, the total power used for bitcoin mining in each time interval must be less than the mining equipment's cumulative power capacity. Therefore, using  $N^{\rm Miner}$  as the number of mining equipment along with  $P_{\rm MAX}^{\rm Miner}$  and  $P_{\rm MIN}^{\rm Miner}$  being the limits on the power consumption of individual mining equipment, eq 6 defines the limits to the power dedicated toward the bitcoin mining equipment.

$$N^{\text{Miner}} \cdot P_{\text{MIN}}^{\text{Miner}} \le P_t^{\text{Miner}} \le N^{\text{Miner}} \cdot P_{\text{MAX}}^{\text{Miner}} \tag{6}$$

The total heat that must be removed from the mining equipment  $(P_t^{\rm heat})$  can be calculated using the total power consumed by the mining equipment and the associated factor (hf) as follows

$$P_t^{\text{heat}} = P_t^{\text{Miner}} \cdot \text{hf} \tag{7}$$

Considering the coefficient of performance (COP) for the heat pumps, which represents the ratio of useful heat output to the energy input required to achieve that heat transfer,  $^{42}$  eq 8 calculates the total power consumed by this auxiliary equipment  $(P_t^{\rm HP})$ .

$$P_t^{\text{heat}} = P_t^{\text{HP}} \cdot \text{COP} \tag{8}$$

However, based on the number of heat pumps utilized ( $N^{\rm HP}$ ), there are limits to the total power consumed in heat pumps based on the individual capacities of the pumps, as described in the following equation

$$N^{\mathrm{HP}} \cdot P_{\mathrm{MIN}}^{\mathrm{HP}} \le P_t^{\mathrm{HP}} \le N^{\mathrm{HP}} \cdot P_{\mathrm{MAX}}^{\mathrm{HP}} \tag{9}$$

where  $P_{\rm MAX}^{\rm HP}$  and  $P_{\rm MIN}^{\rm HP}$  refer to the heat pump's maximum and minimum power consumption, respectively. The profit calculation is based on the revenue generated for the entire life span of the project and the associated costs during this period. The total revenue for the project (REVENUE) can be calculated as the summation of the revenue generated at the hourly resolution scale considered in the study, represented as follows

$$REVENUE = \sum_{t \in T} rev_t$$
 (10)

where  $\operatorname{rev}_t$  denotes the revenue generated in various time intervals using the mined bitcoin. We utilize eq 11 to calculate the revenue from bitcoin mining in different time intervals.  $^{2.5,32}$  The calculation of revenue from bitcoin mining depends on several factors. The market price of bitcoin  $(\operatorname{SP}_t^{\operatorname{BIT}})$  sets the selling value of each mined coin. Meanwhile, the network difficulty  $(D_t)$  represents how hard it is to mine a new block in the blockchain.  $^{4.3}$  As miners join the network or as more hashing power is added to the system, the difficulty in ensuring the rate of block generation remains consistent. The hashing power  $(H_t)$  indicates the computational capability of the mining equipment to determine the speed and efficiency of bitcoin mining. The block reward (R) is used to calculate the number of bitcoins awarded for mining a new block,  $^{4.5}$  while the length of the mining time interval  $(t_{\rm m})$  then defines the period over which this revenue is earned. Lastly, the constant  $2^{32}$  is the expected number of hashes to find a valid block.  $^{2.5}$ 

$$rev_{t} = \frac{SP_{t}^{BIT} \cdot R \cdot H_{t} \cdot t_{m}}{D_{t} \cdot 2^{32}}$$
(11)

The capital expenditure for the mining equipment ( $C^{Miner}$ ) and the heat pumps ( $C^{HP}$ ) can be calculated using the number of mining equipment and heat pumps and the costs of individual components ( $AC^{Miner}$  and  $AC^{HP}$ ), which are summed to obtain the total initial expenditure (CAPEX).

$$CAPEX = C^{Miner} + C^{HP}$$
 (12)

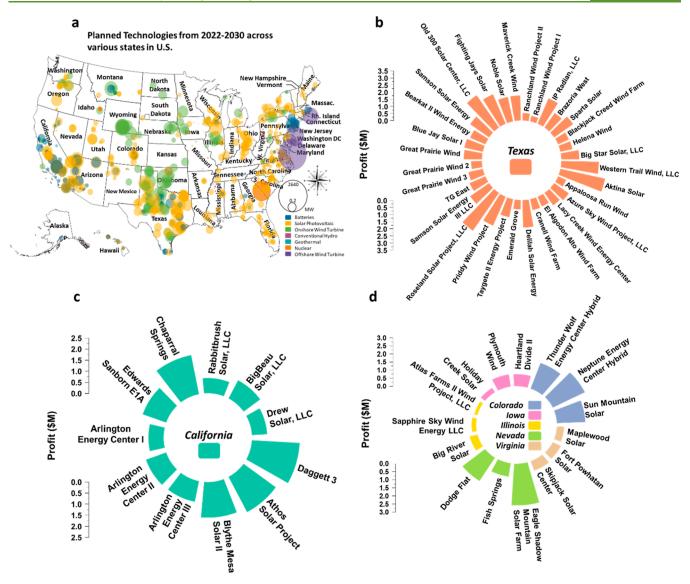


Figure 2. (a) Planned technologies from 2022 to 2030 across various states in the U.S. (b) Profitability of planned solar and wind installations in Texas based on bitcoin mining. (c) Profitability of planned solar installations in California based on using bitcoin mining. (d) Profitability of planned solar and wind installations in Colorado, Iowa, Illinois, Nevada, and Virginia based on using bitcoin mining.

$$C^{\text{Miner}} = N^{\text{Miner}} \cdot AC^{\text{Miner}} \tag{13}$$

$$C^{HP} = N^{HP} \cdot AC^{HP} \tag{14}$$

When the precommercial phase concludes, the planned installation operators can recoup some initial investment in the bitcoin mining setup. As an illustration, a few alternatives are available in the market, allowing planned installation operators to sell the used mining equipment. In the case of heat pumps, a previous study indicates a steady increase in heat pump deployment over the next decade. This growing market trend suggests that planned installation operators can successfully salvage their auxiliary heat pump setup at the end of the precommercial phase, which is considerably shorter than the total operating life of heat pumps. Now, based on the considered project life and the components used, the total salvage value (SAL) can be calculated using eqs 15–17.

$$SAL^{Miner} = sMiner \cdot C^{Miner}$$
 (15)

$$SAL^{HP} = sHP \cdot C^{HP} \tag{16}$$

$$SAL = SAL^{Miner} + SAL^{HP}$$
 (17)

where SAL<sup>Miner</sup> and SAL<sup>HP</sup> refer to the salvage values for miners and auxiliary heat pumps, respectively. Also, sMiner and sHP refer to the corresponding depreciation factors. In this study, since the miner's life is the same as the project life, zero salvage value was considered for the miners. The operating cost for the planned renewable installation (Opexrenewable) and the heat pumps (Opexhpump) can be calculated using eqs 18 and 19.

$$Opexhpump = \sum_{t \in T} P_t^{HP} \cdot opfachp$$
(18)

Opexrenewable=
$$\sum_{t \in T} P_t^{\text{UTL}}$$
·opfacrenew (19)

where opfachp and opfacrenew refer to the summed operational and maintenance cost units for the heat pump and renewable facility, respectively. The above optimization modeling framework was used to analyze the added profitability using bitcoin mining during the precommercial phase for all the planned renewable installations considered in the study.

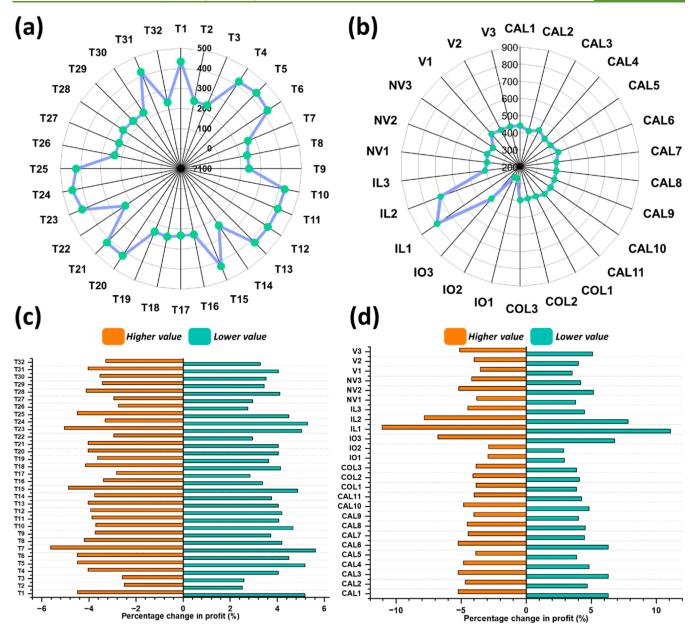


Figure 3. (a) Sensitivity analysis results based on minimum values of bitcoin mining equipment cost for the planned renewable installations in Texas. (b) Sensitivity analysis results based on minimum values of bitcoin mining equipment cost for the planned renewable installations in California, Colorado, Illinois, Iowa, Nevada, and Virginia. (c) Sensitivity analysis results based on minimum values of auxiliary equipment cost for the planned renewable installations in Texas. (d) Sensitivity analysis results based on minimum values of auxiliary equipment cost for the planned renewable installations in California, Colorado, Illinois, Iowa, Nevada, and Virginia. The abbreviations assigned to the planned renewable installations considered in this study are detailed in Table 2.

## ■ RESULTS AND DISCUSSION

As depicted in Figure 2, Texas and California emerged as states with the most planned installations that have proved profitable. Meanwhile, states such as Colorado, Illinois, Iowa, Nevada, and Virginia have fewer installations but still show profitability through bitcoin mining. Among the profitable installations, solar photovoltaics dominate, accounting for 64% of the total, with California, Colorado, Nevada, and Virginia only having solar installations that proved profitable. This trend could be due to the geographical advantage that some states have for solar or wind energy sources. In Texas, the Aktina Solar and Roseland Solar Projects, both solar photovoltaic systems with an individual nameplate capacity of 250 MW, are found to be the most profitable, generating a maximum profit of \$3.23M.

However, the Western Trail Wind project, a wind energy system with a capacity of 367 MW, had a slightly lower profitability of \$2.65M. The lower profitability could be due to the distribution of available power based on the location of the facility, which can impact utilization and lead to decreased profits. It is worth noting that the profitability of a mining system hinges on various factors. Among these, the specific time intervals during which mining occurs are crucial. Specifically, the time intervals for optimal operations often coincide with periods of steady energy availability. Given the intermittent nature of renewable energy sources, the overall available power can vary significantly. This variability, in turn, affects how many bitcoins can be mined during particular time intervals. During the same interval, the market dynamics, such

Table 1. List of Notations Used in the Study

| CAPEX  total capital expenditure required to use bitcoin mining for extracting added profitability during the precommercial phase from a given planned renewable installation facility (\$)  Chinery  Chinery  Chinery  Lotal capital expenditure on the heat pumps which have been used to extract added profitability during the precommercial phase from a given planned renewable installation facility (\$)  Dr.  network difficulty at different time intervals, perpesented by the index t (TH)  H.  Chinery  Chinery  Interval total hashing power at different time intervals corresponding to the power consumption in the mining equipment, represented by the index t (TH)  Nillora  number of heat pumps that have been used to extract added profitability from a given planned renewable installation during the precommercial phase  phase  Openhpump  Total phase  Openhpump  Total phase employing the bitcoin mining setup to extract added profitability from a given planned renewable installation during the precommercial phase employing the bitcoin mining setup to extract added profitability (\$)  Opentrenewable  Openhpump  Total operating expenditure for the auxiliary heat pumps during the precommercial phase employing the bitcoin mining setup to extract added profitability (\$)  Total profit from a given planned renewable installation (kW)  PROFIT  total profit from a given planned renewable installation (kW)  Privat.  by a comparating expenditure for the planned renewable installation (kW) h  privat.  Total profit from a given planned renewable installation facility using bitcoin mining during the precommercial phase (\$)  Power output from the solar PV system in different time intervals for a given planned renewable installation (kW h)  Privat.  Total power from a given planned renewable installation that can be used in bitcoin mining for extracting added profitability during the precommercial phase, represented by the index t (kW h)  Privat.  Total power from a given planned renewable installation used by auxiliary heat pumps during the  | notation               | description   |
|---|------------------------|---|
| Planned renewable installation during the precommercial phase from a given planned renewable installation facility (\$)  Dr. network difficulty at different time intervals, represented by the index t (TH)  R. total hashing power at different time intervals corresponding to the power consumption in the mining equipment, represented by the index t (TH/s)  Nature  Nat   | CAPEX                  |   |
| profitability of different time intervals, represented by the index t (TH)  profitability at different time intervals, represented by the index t (TH)  profitability from a given planned renewable installation during the precommercial phase  profitability from a given planned renewable installation during the precommercial phase  profitability (S)  profitability from a given planned renewable installation during the precommercial phase employing the bitcoin mining setup to extract added profitability from a given planned renewable installation during the precommercial phase employing the bitcoin mining setup to extract added profitability (S)  profitability (S)  Operanewable  total operating expenditure for the auxiliary heat pumps during the precommercial phase employing the bitcoin mining setup to extract added profitability (S)  Practical disperating expenditure for the planned renewable installation during the precommercial phase employing the bitcoin mining setup to extract added profitability (S)  Practical disperating expenditure for the planned renewable installation facility using bitcoin mining during the precommercial phase (S)  Profitability (S)  Profitability (S)  total operating expenditure for the planned renewable installation (kW)  Profitability (S)  total power form a given planned renewable installation facility using bitcoin mining during the precommercial phase (S)  Profitability (S)  total power atting the precommercial phase (Prepresented by the index t (kW h)  Profitability (S)  total apower from a given planned renewable installation that can be used in bitcoin mining for extracting added profitability during the precommercial phase, represented by the index t (kW h)  Profitability (S)  total opwer from a given planned renewable installation used by auxiliary heat pumps during the precommercial phase, represented by the index t (kW h)  Profitability (S)  total surplus power which has not been utilized from a given planned renewable installation, represented by the index t (kW h)  Profit  |                        |   |
| H <sub>t</sub> total hashing power at different time intervals corresponding to the power consumption in the mining equipment, represented by the index t (TH/s)           N <sup>HP</sup> number of heat pumps that have been used to extract added profitability from a given planned renewable installation during the precommercial phase           N <sup>Minure</sup> number of miners which have been used to extract added profitability from a given planned renewable installation during the precommercial phase employing the bitcoin mining setup to extract added profitability (S)           Opexheman         total operating expenditure for the planned renewable installation during the precommercial phase employing the bitcoin mining setup to extract added profitability (S)           Pr         rated wind capacity for a given planned renewable installation (kW)           PROFIT         total profit from a given planned renewable installation facility using bitcoin mining during the precommercial phase (S)           Psolar, power output from the solar PV system in different time intervals for a given planned renewable installation, represented by the index t (kW h)         total power available from a given planned renewable installation that can be used in bitcoin mining for extracting added profitability during the precommercial phase, represented by the index t (kW h)           P <sub>f</sub> <sup>HP</sup> total power from a given planned renewable installation used by auxiliary heat pumps during the precommercial phase, represented by the index t (kW h)           P <sub>f</sub> <sup>HP</sup> total power from a given planned renewable installation used by bitcoin miners during the precommercial phase, represented by the index t (kW h)   | $C^{Miner}$            |   |
| number of heat pumps that have been used to extract added profitability from a given planned renewable installation during the precommercial phase number of miners which have been used to extract added profitability from a given planned renewable installation during the precommercial phase employing the bitcoin mining setup to extract added profitability (\$)  Opexrenewable total operating expenditure for the auxiliary heat pumps during the precommercial phase employing the bitcoin mining setup to extract added profitability (\$)  Opexrenewable total operating expenditure for the planned renewable installation (kW)  PROFIT total profit from a given planned renewable installation (kW)  PROFIT total profit from a given planned renewable installation facility using bitcoin mining during the precommercial phase (\$)  Profit total profit from a given planned renewable installation agiven planned renewable installation total power available from a given planned renewable installation total power available from a given planned renewable installation to total power available from a given planned renewable installation used by auxiliary heat pumps during the precommercial phase, represented by the index t (kW h)  Privation total power from a given planned renewable installation used by auxiliary heat pumps during the precommercial phase, represented by the index t (kW h)  Privation total power from a given planned renewable installation used by bitcoin miners during the precommercial phase, represented by the index t (kW h)  Privation total surplus power which has not been utilized from a given planned renewable installation in bitcoin mining for extracting added profitability during the precommercial phase, represented by the index t (kW h)  Privation total surplus power which has not been utilized from a given planned renewable installation in bitcoin mining for extracting added profitability during the precommercial phase, represented by the index t (kW h)  Privation total surplus power which has not been utilized from  | $D_t$                  | network difficulty at different time intervals, represented by the index $t$ (TH)   |
| number of miners which have been used to extract added profitability from a given planned renewable installation during the precommercial phase employing the bitcoin mining setup to extract added profitability (\$\$)  Opexhemowable total operating expenditure for the auxiliary heat pumps during the precommercial phase employing the bitcoin mining setup to extract added profitability (\$\$)  Opexrenewable total operating expenditure for the planned renewable installation during the precommercial phase employing the bitcoin mining setup to extract added profitability (\$\$)  Pr rated wind capacity for a given planned renewable installation (kW)  PROFIT total profit from a given planned renewable installation facility using bitcoin mining during the precommercial phase (\$\$)  Psolar, power output from the solar PV system in different time intervals for a given planned renewable installation, represented by the index t (kW h) total power available from a given planned renewable installation that can be used in bitcoin mining for extracting added profitability during the precommercial phase, represented by the index t (kW h)  Pthe total power from a given planned renewable installation used by auxiliary heat pumps during the precommercial phase, represented by the index t (kW h)  phore total power from a given planned renewable installation used by butcoin miners during the precommercial phase, represented by the index t (kW h)  phore total power which has not been utilized from a given planned renewable installation in bitcoin mining for extracting added profitability during the precommercial phase, represented by the index t (kW h)  Pwind, power output from the wind turbine in different time intervals for a given planned renewable installation, represented by the index t (kW h)  Pwind, power output from the wind turbine in different time intervals during the precommercial phase, represented by the index t (kW h)  Pwind, power output from the wind turbine in different time intervals during the precommercial phase from a g  | •                      |   |
| Opexhpump total operating expenditure for the auxiliary heat pumps during the precommercial phase employing the bitcoin mining setup to extract added profitability (\$)  Opexrenewable total operating expenditure for the planned renewable installation during the precommercial phase employing the bitcoin mining setup to extract added profitability (\$)  Pr rated wind capacity for a given planned renewable installation (kW)  PROFIT total profit from a given planned renewable installation facility using bitcoin mining during the precommercial phase (\$)  Provalt profit from a given planned renewable installation that can be used in bitcoin mining for extracting added profitability during the precommercial phase, represented by the index t (kW h)  Profit total power from a given planned renewable installation that can be used in bitcoin mining for extracting added profitability during the precommercial phase, represented by the index t (kW h)  Profit total cooling load for the mining equipment in different time intervals during the precommercial phase, represented by the index t (kW h)  Profit total power from a given planned renewable installation used by auxiliary heat pumps during the precommercial phase, represented by the index t (kW h)  Profit total power from a given planned renewable installation used by bitcoin miners during the precommercial phase, represented by the index t (kW h)  Profit total power utilized from a given planned renewable installation in bitcoin mining for extracting added profitability during the precommercial phase, represented by the index t (kW h)  Profit total power utilized from a given planned renewable installation in bitcoin mining for extracting added profitability during the precommercial phase, represented by the index t (kW h)  Profit total power utilized from a given planned renewable installation, represented by the index t (kW h)  Profit total saving and the precommercial phase from a given planned renewable installation, represented by the index t (kW h)  Profit total savin   |                        |   |
| profitability (\$)*  Opexnewable total operating expenditure for the planned renewable installation during the precommercial phase employing the bitcoin mining setup to extract added profitability (\$)*  Pr ated wind capacity for a given planned renewable installation (kW)  PROFIT total profit from a given planned renewable installation facility using bitcoin mining during the precommercial phase (\$)*  Psolar, power output from the solar PV system in different time intervals for a given planned renewable installation, represented by the index t (kW h)  Ptotal power available from a given planned renewable installation that can be used in bitcoin mining for extracting added profitability during the precommercial phase, represented by the index t (kW h)  Ptin total cooling load for the mining equipment in different time intervals during the precommercial phase, represented by the index t (kW h)  total power from a given planned renewable installation used by auxiliary heat pumps during the precommercial phase, represented by the index t (kW h)  Ptin total surplus power which has not been utilized from a given planned renewable installation in bitcoin mining for extracting added profitability during the precommercial phase, represented by the index t (kW h)  Ptin total surplus power which has not been utilized from a given planned renewable installation in bitcoin mining for extracting added profitability during the precommercial phase, represented by the index t (kW h)  Ptin total power utilized from a given planned renewable installation in bitcoin mining for extracting added profitability during the precommercial phase, represented by the index t (kW h)  power output from the wind turbine in different time intervals for a given planned renewable installation, represented by the index t (kW h)  rev, revenue generated from bitcoin mining in different time intervals during the precommercial phase, represented by the index t (kW h)  rev, revenue generated from bitcoin mining in different time intervals during the pre   | $N^{ m Miner}$         |   |
| Pr rated wind capacity for a given planned renewable installation (kW)  PROFIT total profit from a given planned renewable installation facility using bitcoin mining during the precommercial phase (\$)  Psolar, power output from the solar PV system in different time intervals for a given planned renewable installation, represented by the index t (kW h)  Pt <sup>AVAIL</sup> total power available from a given planned renewable installation that can be used in bitcoin mining for extracting added profitability during the precommercial phase, represented by the index t (kW h)  Pt <sup>BOSI</sup> total power from a given planned renewable installation used by auxiliary heat pumps during the precommercial phase, represented by the index t (kW h)  Pt <sup>MINIC</sup> total power from a given planned renewable installation used by auxiliary heat pumps during the precommercial phase, represented by the index t (kW h)  Pt <sup>MINIC</sup> total power which has not been utilized from a given planned renewable installation in bitcoin mining for extracting added profitability during the precommercial phase, represented by the index t (kW h)  Pt <sup>MID</sup> total power utilized from a given planned renewable installation in bitcoin mining for extracting added profitability during the precommercial phase, represented by the index t (kW h)  Pwindt power utilized from a given planned renewable installation in bitcoin mining for extracting added profitability during the precommercial phase, represented by the index t (kW h)  Pwindt power output from the wind turbine in different time intervals for a given planned renewable installation, represented by the index t (kW h)  Pwindt power output from the wind turbine in different time intervals for a given planned renewable installation, represented by the index t (kW h)  Pwindt power output from the wind turbine in different time intervals for a given planned renewable installation, represented by the index t (kW h)  Pwindt power output from the wind turbine in different time intervals for a given planned renewable installation fo | Opexhpump              |   |
| PROFIT total profit from a given planned renewable installation facility using bitcoin mining during the precommercial phase (\$)  Psolar,  power output from the solar PV system in different time intervals for a given planned renewable installation, represented by the index t (kW h)  Ptotal power available from a given planned renewable installation that can be used in bitcoin mining for extracting added profitability during the precommercial phase, represented by the index t (kW h)  Ptotal cooling load for the mining equipment in different time intervals during the precommercial phase, represented by the index t (kW h)  Ptotal power from a given planned renewable installation used by auxiliary heat pumps during the precommercial phase, represented by the index t (kW h)  Ptotal power from a given planned renewable installation used by bitcoin miners during the precommercial phase, represented by the index t (kW h)  Ptotal power which has not been utilized from a given planned renewable installation in bitcoin mining for extracting added profitability during the precommercial phase, represented by the index t (kW h)  Ptotal power utilized from a given planned renewable installation in bitcoin mining for extracting added profitability during the precommercial phase, represented by the index t (kW h)  Pwind, power output from the wind turbine in different time intervals for a given planned renewable installation, represented by the index t (kW h)  rev <sub>t</sub> revenue generated from bitcoin mining in different time intervals during the precommercial phase, represented by the index t (kW h)  SAL  total salvage value at the end of project life to use bitcoin mining for extracting added profitability during the precommercial phase from a given planned renewable installation (\$)  SAL  total salvage value for the heat pumps which have been used to extract added profitability during the precommercial phase from a given planned renewable installation (\$)  SAL  bitcoin selling price at different time intervals, represented by th                                       | Opexrenewable          |   |
| Psolar, power output from the solar PV system in different time intervals for a given planned renewable installation, represented by the index t (kW h)  Ptival total power available from a given planned renewable installation that can be used in bitcoin mining for extracting added profitability during the precommercial phase, represented by the index t (kW h)  Ptival total cooling load for the mining equipment in different time intervals during the precommercial phase, represented by the index t (kW h)  Ptival total power from a given planned renewable installation used by auxiliary heat pumps during the precommercial phase, represented by the index t (kW h)  Ptival total power from a given planned renewable installation used by bitcoin miners during the precommercial phase, represented by the index t (kW h)  Ptival total surplus power which has not been utilized from a given planned renewable installation in bitcoin mining for extracting added profitability during the precommercial phase, represented by the index t (kW h)  Ptival total surplus power which has not been utilized from a given planned renewable installation in bitcoin mining for extracting added profitability during the precommercial phase, represented by the index t (kW h)  Ptival total surplus power which has not been utilized from a given planned renewable installation, represented by the index t (kW h)  Ptival total surplus power which has not been utilized from a given planned renewable installation, represented by the index t (kW h)  Ptival power output from the wind turbine in different time intervals for a given planned renewable installation, represented by the index t (kW h)  Pwind, power output from the wind turbine in different time intervals during the precommercial phase, represented by the index t (kW h)  Pwind, power output from the wind turbine in different time intervals during the precommercial phase, represented by the index t (kW h)  Pwind, power output from the wind turbine in different time intervals during the precommercial  | Pr                     | rated wind capacity for a given planned renewable installation (kW)   |
| $ P_t^{\text{AVAIL}}                                   $  | PROFIT                 | total profit from a given planned renewable installation facility using bitcoin mining during the precommercial phase (\$)                        |
| precommercial phase, represented by the index $t$ (kW h) $P_t^{\text{host}}$ total cooling load for the mining equipment in different time intervals during the precommercial phase, represented by the index $t$ (kW h) $P_t^{\text{HIP}}$ total power from a given planned renewable installation used by auxiliary heat pumps during the precommercial phase, represented by the index $t$ (kW h) $P_t^{\text{Miner}}$ total power from a given planned renewable installation used by bitcoin miners during the precommercial phase, represented by the index $t$ (kW h) $P_t^{\text{Numplus}}$ total surplus power which has not been utilized from a given planned renewable installation in bitcoin mining for extracting added profitability during the precommercial phase, represented by the index $t$ (kW h) $P_t^{\text{UTL}}$ total power utilized from a given planned renewable installation in bitcoin mining for extracting added profitability during the precommercial phase, represented by the index $t$ (kW h)  Pwind, power output from the wind turbine in different time intervals for a given planned renewable installation, represented by the index $t$ (kW h)  rev, revenue generated from bitcoin mining in different time intervals during the precommercial phase, represented by the index $t$ (s)  rsolar, incident solar radiation for a given planned renewable installation, represented by the index $t$ (W/m²)  SAL total salvage value at the end of project life to use bitcoin mining for extracting added profitability during the precommercial phase from a given planned renewable installation (\$)  SAL <sup>Miner</sup> total salvage value for the heat pumps which have been used to extract added profitability during the precommercial phase from a given planned renewable installation (\$)  SPt <sup>HT</sup> bitcoin selling price at different time intervals, represented by the index $t$ (\$) $t$ total mining time interval to use bitcoin mining for extracting added profitability from a given planned renewable installation facility (s)  | $Psolar_t$             | power output from the solar PV system in different time intervals for a given planned renewable installation, represented by the index $t$ (kW h) |
| $P_t^{\rm HP}$ total power from a given planned renewable installation used by auxiliary heat pumps during the precommercial phase, represented by the index $t$ (kW h) $P_t^{\rm Miner}$ total power from a given planned renewable installation used by bitcoin miners during the precommercial phase, represented by the index $t$ (kW h) $P_t^{\rm Surplus}$ total surplus power which has not been utilized from a given planned renewable installation in bitcoin mining for extracting added profitability during the precommercial phase, represented by the index $t$ (kW h) $P_t^{\rm UTL}$ total power utilized from a given planned renewable installation in bitcoin mining for extracting added profitability during the precommercial phase, represented by the index $t$ (kW h)  Pwind $t$ power output from the wind turbine in different time intervals for a given planned renewable installation, represented by the index $t$ (kW h)  revenue generated from bitcoin mining in different time intervals during the precommercial phase, represented by the index $t$ (%)  rsolar, incident solar radiation for a given planned renewable installation, represented by the index $t$ (W/m²)  SAL total salvage value at the end of project life to use bitcoin mining for extracting added profitability during the precommercial phase from a given planned renewable installation (\$)  SAL total salvage value for the heat pumps which have been used to extract added profitability during the precommercial phase from a given planned renewable installation (\$)  SPIT bitcoin selling price at different time intervals, represented by the index $t$ (\$) $t_{\rm m}$ total mining time interval to use bitcoin mining for extracting added profitability from a given planned renewable installation facility (\$)   | $P_t^{	ext{AVAIL}}$    |   |
| total power from a given planned renewable installation used by bitcoin miners during the precommercial phase, represented by the index $t$ (kW h) $P_t^{\text{Nimplus}}$ total surplus power which has not been utilized from a given planned renewable installation in bitcoin mining for extracting added profitability during the precommercial phase, represented by the index $t$ (kW h) $P_t^{\text{UTIL}}$ total power utilized from a given planned renewable installation in bitcoin mining for extracting added profitability during the precommercial phase, represented by the index $t$ (kW h)  Pwindt power output from the wind turbine in different time intervals for a given planned renewable installation, represented by the index $t$ (kW h)  revenue generated from bitcoin mining in different time intervals during the precommercial phase, represented by the index $t$ (kW h)  revenue generated from bitcoin mining in different time intervals during the precommercial phase, represented by the index $t$ (kW h)  revenue generated from bitcoin mining in different time intervals during the precommercial phase, represented by the index $t$ (kW h)  revenue generated from bitcoin mining in different time intervals during the precommercial phase, represented by the index $t$ (kW h)  revenue generated from bitcoin mining in different time intervals during the precommercial phase from a given planned renewable installation for a given planned renewable installation facility (\$)  SAL total salvage value at the end of project life to use bitcoin mining for extracting added profitability during the precommercial phase from a given planned renewable installation (\$)  SAL total salvage value for the heat pumps which have been used to extract added profitability during the precommercial phase from a given planned renewable installation (\$)  SPBIT bitcoin selling price at different time intervals, represented by the index $t$ (\$)  total mining time interval to use bitcoin mining for extracting added profitability from a given planned renewable ins   | $P_t^{ m heat}$        | total cooling load for the mining equipment in different time intervals during the precommercial phase, represented by the index $t$ (kW h)       |
| total surplus power which has not been utilized from a given planned renewable installation in bitcoin mining for extracting added profitability during the precommercial phase, represented by the index $t$ (kW h)  Puttle total power utilized from a given planned renewable installation in bitcoin mining for extracting added profitability during the precommercial phase, represented by the index $t$ (kW h)  Pwindthologoup power output from the wind turbine in different time intervals for a given planned renewable installation, represented by the index $t$ (kW h)  revthologoup power output from the wind turbine in different time intervals during the precommercial phase, represented by the index $t$ (kW h)  revthologoup power output from the wind turbine in different time intervals during the precommercial phase, represented by the index $t$ (kW h)  revthologoup power output from the wind turbine in different time intervals during the precommercial phase, represented by the index $t$ (kW h)  revthologoup power output from the wind turbine in different time intervals during the precommercial phase, represented by the index $t$ (kW h)  revthologoup power output from the wind turbine in different time intervals during the precommercial phase from a given planned renewable installation (\$)  SAL total salvage value at the end of project life to use bitcoin mining for extract added profitability during the precommercial phase from a given planned renewable installation (\$)  SAL total salvage value for the mining equipment which has been used to extract added profitability during the precommercial phase from a given planned renewable installation (\$)  SPIT bitcoin selling price at different time intervals, represented by the index $t$ (\$) $t$ total utilization percentage of the available power from a given planned renewable installation (%)  | $P_t^{ m HP}$          |   |
| during the precommercial phase, represented by the index $t$ (kW h)  Putt total power utilized from a given planned renewable installation in bitcoin mining for extracting added profitability during the precommercial phase, represented by the index $t$ (kW h)  Pwind, power output from the wind turbine in different time intervals for a given planned renewable installation, represented by the index $t$ (kW h)  reve, revenue generated from bitcoin mining in different time intervals during the precommercial phase, represented by the index $t$ (\$\frac{1}{2}\$) incident solar radiation for a given planned renewable installation, represented by the index $t$ (W/m²)  SAL total salvage value at the end of project life to use bitcoin mining for extracting added profitability during the precommercial phase from a given planned renewable installation facility (\$\frac{1}{2}\$)  SAL <sup>HP</sup> total salvage value for the heat pumps which have been used to extract added profitability during the precommercial phase from a given planned renewable installation (\$\frac{1}{2}\$)  SAL <sup>Miner</sup> total salvage value for the mining equipment which has been used to extract added profitability during the precommercial phase from a given planned renewable installation (\$\frac{1}{2}\$)  SPP <sup>BIT</sup> bitcoin selling price at different time intervals, represented by the index $t$ (\$\frac{1}{2}\$) $t$ total mining time interval to use bitcoin mining for extracting added profitability from a given planned renewable installation facility (\$\frac{1}{2}\$)  UTL total utilization percentage of the available power from a given planned renewable installation (%)  | $P_t^{ m Miner}$       |   |
| phase, represented by the index t (kW h)  Pwind <sub>t</sub> power output from the wind turbine in different time intervals for a given planned renewable installation, represented by the index t (kW h)  rev <sub>t</sub> revenue generated from bitcoin mining in different time intervals during the precommercial phase, represented by the index t (\$)  rsolar <sub>t</sub> incident solar radiation for a given planned renewable installation, represented by the index t (W/m²)  SAL total salvage value at the end of project life to use bitcoin mining for extracting added profitability during the precommercial phase from a given planned renewable installation facility (\$)  SAL <sup>HP</sup> total salvage value for the heat pumps which have been used to extract added profitability during the precommercial phase from a given planned renewable installation (\$)  SAL <sup>Miner</sup> total salvage value for the mining equipment which has been used to extract added profitability during the precommercial phase from a given planned renewable installation (\$)  SPP <sup>BIT</sup> bitcoin selling price at different time intervals, represented by the index t (\$)  t <sub>m</sub> total mining time interval to use bitcoin mining for extracting added profitability from a given planned renewable installation facility (s)  UTL total utilization percentage of the available power from a given planned renewable installation (%)  | $P_t^{\text{Surplus}}$ |   |
| rev $_t$ revenue generated from bitcoin mining in different time intervals during the precommercial phase, represented by the index $t$ (\$) rsolar $_t$ incident solar radiation for a given planned renewable installation, represented by the index $t$ (W/m²)  SAL total salvage value at the end of project life to use bitcoin mining for extracting added profitability during the precommercial phase from a given planned renewable installation facility (\$)  SAL <sup>HP</sup> total salvage value for the heat pumps which have been used to extract added profitability during the precommercial phase from a given planned renewable installation (\$)  SAL <sup>Miner</sup> total salvage value for the mining equipment which has been used to extract added profitability during the precommercial phase from a given planned renewable installation (\$)  SPP <sup>BIT</sup> bitcoin selling price at different time intervals, represented by the index $t$ (\$) $t_{\rm m}$ total mining time interval to use bitcoin mining for extracting added profitability from a given planned renewable installation facility (\$)  UTL total utilization percentage of the available power from a given planned renewable installation (%)   | $P_t^{\mathrm{UTL}}$   |   |
| incident solar radiation for a given planned renewable installation, represented by the index $t$ (W/m²)  SAL total salvage value at the end of project life to use bitcoin mining for extracting added profitability during the precommercial phase from a given planned renewable installation facility (\$)  SAL <sup>HP</sup> total salvage value for the heat pumps which have been used to extract added profitability during the precommercial phase from a given planned renewable installation (\$)  SAL <sup>Miner</sup> total salvage value for the mining equipment which has been used to extract added profitability during the precommercial phase from a given planned renewable installation (\$)  SPI <sup>BIT</sup> bitcoin selling price at different time intervals, represented by the index $t$ (\$) $t_{\rm m}$ total mining time interval to use bitcoin mining for extracting added profitability from a given planned renewable installation facility (\$)  UTL total utilization percentage of the available power from a given planned renewable installation (%)  | $Pwind_t$              | power output from the wind turbine in different time intervals for a given planned renewable installation, represented by the index $t$ (kW h)    |
| total salvage value at the end of project life to use bitcoin mining for extracting added profitability during the precommercial phase from a given planned renewable installation facility (\$)  SAL <sup>HP</sup> total salvage value for the heat pumps which have been used to extract added profitability during the precommercial phase from a given planned renewable installation (\$)  SAL <sup>Miner</sup> total salvage value for the mining equipment which has been used to extract added profitability during the precommercial phase from a given planned renewable installation (\$)  SP <sup>BIT</sup> bitcoin selling price at different time intervals, represented by the index t (\$)  t <sub>m</sub> total mining time interval to use bitcoin mining for extracting added profitability from a given planned renewable installation facility (\$)  UTL total utilization percentage of the available power from a given planned renewable installation (%)   | $rev_t$                | revenue generated from bitcoin mining in different time intervals during the precommercial phase, represented by the index $t$ (\$)               |
| planned renewable installation facility (\$)  SAL <sup>HP</sup> total salvage value for the heat pumps which have been used to extract added profitability during the precommercial phase from a given planned renewable installation (\$)  SAL <sup>Miner</sup> total salvage value for the mining equipment which has been used to extract added profitability during the precommercial phase from a given planned renewable installation (\$)  SP <sub>t</sub> <sup>BIT</sup> bitcoin selling price at different time intervals, represented by the index t (\$)  t <sub>m</sub> total mining time interval to use bitcoin mining for extracting added profitability from a given planned renewable installation facility (\$)  UTL total utilization percentage of the available power from a given planned renewable installation (%)  | $rsolar_t$             | incident solar radiation for a given planned renewable installation, represented by the index $t$ (W/m $^2$ )                                     |
| renewable installation (\$)  SAL Miner total salvage value for the mining equipment which has been used to extract added profitability during the precommercial phase from a given planned renewable installation (\$)  SP $_t^{BIT}$ bitcoin selling price at different time intervals, represented by the index $t$ (\$) $t_m$ total mining time interval to use bitcoin mining for extracting added profitability from a given planned renewable installation facility (\$)  UTL total utilization percentage of the available power from a given planned renewable installation (%)   | SAL                    |   |
| planned renewable installation (\$)  SP $_t^{\text{BIT}}$ bitcoin selling price at different time intervals, represented by the index $t$ (\$) $t_{\text{m}}$ total mining time interval to use bitcoin mining for extracting added profitability from a given planned renewable installation facility (s)  UTL total utilization percentage of the available power from a given planned renewable installation (%)   | SAL <sup>HP</sup>      |   |
| $t_{\rm m}$ total mining time interval to use bitcoin mining for extracting added profitability from a given planned renewable installation facility (s) UTL total utilization percentage of the available power from a given planned renewable installation (%)  | SAL <sup>Miner</sup>   |   |
| $t_{\rm m}$ total mining time interval to use bitcoin mining for extracting added profitability from a given planned renewable installation facility (s) UTL total utilization percentage of the available power from a given planned renewable installation (%)  | $SP_t^{BIT}$           |   |
| UTL total utilization percentage of the available power from a given planned renewable installation (%)   | -                      |   |
|   |                        |   |
|   | $v_t^{\mathrm{s}}$     | wind speed for a given planned renewable installation, represented by the index $t \pmod{t}$  |

as bitcoin selling prices and network difficulty levels, also affect the total profits. Therefore, mining profits can fluctuate based on the interplay between energy availability and market dynamics at varying times. In this regard, it is essential to size the mining farm strategically, factoring the energy fluctuations and market conditions to maximize profitability. As a result, complete utilization of the nameplate capacity may not result in increased profits. These findings indicate that bitcoin mining is an effective alternative to generate additional profits during the precommercial phase. However, in the long term, the planned installations would supply energy to the grid based on the applicability of the power purchase agreements. 50,51 Moreover, added investments would be required at the end of the precommercial phase to continue mining under profitable scenarios due to constant technological advancements in the power efficiencies of bitcoin miners.<sup>2</sup>

In this work, we utilize historical data on market prices and technological efficiencies, providing an empirical foundation. While this work does not model the market volatilities, we conduct a single-point sensitivity analysis to study the effect of

cost parameters on the profitability that can be obtained from bitcoin mining based on power generation from planned renewable installations. It was observed that an increase in mining equipment cost did not affect the total profitability, which can be attributed to the optimal sizing of mining operations. On the other hand, a decrease in mining equipment cost led to a substantial increase in profits, as depicted in Figure 3a,b. The maximum increment in profitability was observed for the Alta Farms II Wind Project in Illinois. At the same time, the El Algodon Alto wind farm in Texas attained the minimum increment in profits based on a reduction in the mining equipment cost. Additionally, the capital expenditure on heat pumps also affected the profit, as illustrated in Figure 3c,d, but the impact was considerably less significant. At the lower range of heat pump costs, the percentage increment in profits generated among planned renewable installations varied from 2.52% to a maximum of 11.08%.

The findings indicate the potential for appropriate policy support, which could bolster the economic competitiveness of

Table 2. Serial Number Assigned to Each Planned Renewable Installation Considered in the Study, along with Their Power Source and Installed Capacity

| sr.<br>no. | state and location                            | power source          | capacity<br>(MW) | abbreviation | sr.<br>no. | state and location                           | power source            | capacity<br>(MW) | abbreviation |
|------------|---|-----------------------|------------------|--------------|------------|--|-------------------------|------------------|--------------|
| 1          | California——Drew Solar<br>LLC                 | solar<br>photovoltaic | 50               | CAL1         | 30         | Texas——Ranchland Wind<br>Project I           | onshore wind turbine    | 58               | Т7           |
| 2          | California——BigBeau<br>Solar, LLC             | solar<br>photovoltaic | 64               | CAL2         | 31         | Texas——Ranchland Wind<br>Project II          | onshore wind turbine    | 74               | Т8           |
| 3          | California——Rabbitbrush<br>Solar, LLC         | solar<br>photovoltaic | 50               | CAL3         | 32         | Texas——Maverick Creek<br>Wind                | onshore wind turbine    | 246              | Т9           |
| 4          | California——Chaparral<br>Springs              | solar<br>photovoltaic | 125              | CAL4         | 33         | Texas—Noble Solar                            | solar<br>photovoltaic   | 138              | T10          |
| 5          | California——Edwards<br>Sanborn E1A            | solar<br>photovoltaic | 78               | CAL5         | 34         | Texas——Fighting Jays<br>Solar Project        | solar<br>photovoltaic   | 175              | T11          |
| 6          | California——Arlington<br>Energy Center II     | solar<br>photovoltaic | 50               | CAL6         | 35         | Texas—Old 300 Solar<br>Center, LLC           | solar<br>photovoltaic   | 215              | T12          |
| 7          | California——Arlington<br>Energy Center II     | solar<br>photovoltaic | 67               | CAL7         | 36         | Texas——Samson Solar<br>Energy                | solar<br>photovoltaic   | 125              | T13          |
| 8          | California——Arlington<br>Energy Center III    | solar<br>photovoltaic | 66               | CAL8         | 37         | Texas—Bearkat II Wind<br>Energy LLC          | onshore wind<br>turbine | 163              | T14          |
| 9          | California——Blythe Mesa<br>Solar II           | solar<br>photovoltaic | 112              | CAL9         | 38         | Texas——Blue Jay Solar I,<br>LLC              | solar<br>photovoltaic   | 105              | T15          |
| 10         | California——Athos Solar<br>Project            | solar<br>photovoltaic | 125              | CAL10        | 39         | Texas——Great Prairie<br>Wind                 | onshore wind turbine    | 179              | T16          |
| 11         | California——Daggett 3                         | solar<br>photovoltaic | 150              | CAL11        | 40         | Texas——Great Prairie<br>Wind 2               | onshore wind turbine    | 105              | T17          |
| 12         | Colorado—Sun Mountain<br>Solar 1              | solar<br>photovoltaic | 100              | COL1         | 41         | Texas——Great Prairie<br>Wind 3               | onshore wind turbine    | 150              | T18          |
| 13         | Colorado——Neptune<br>Energy Center Hybrid     | solar<br>photovoltaic | 125              | COL2         | 42         | Texas—TG East                                | onshore wind turbine    | 168              | T19          |
| 14         | Colorado—Thunder Wolf<br>Energy Center Hybrid | solar<br>photovoltaic | 100              | COL3         | 43         | Texas——Samson Solar<br>Energy III LLC        | solar<br>photovoltaic   | 125              | T20          |
| 15         | Iowa——Heartland Divide<br>II                  | onshore wind turbine  | 100              | IO1          | 44         | Texas——Roseland Solar<br>Project, LLC        | solar<br>photovoltaic   | 250              | T21          |
| 16         | Iowa——Plymouth Wind                           | onshore wind turbine  | 102              | IO2          | 45         | Texas——Priddy Wind<br>Project                | onshore wind turbine    | 303              | T22          |
| 17         | Iowa——Holliday Creek<br>Solar                 | solar<br>photovoltaic | 50               | IO3          | 46         | Texas——Taygete II Energy<br>Project          | solar<br>photovoltaic   | 102              | T23          |
| 18         | Illinois——Alta Farms II<br>Wind Project, LLC  | onshore wind turbine  | 101              | IL1          | 47         | Texas——Emerald Grove                         | solar<br>photovoltaic   | 54               | T24          |
| 19         | Illinois——Sapphire Sky<br>Wind Energy LLC     | onshore wind turbine  | 130              | IL2          | 48         | Texas——Delilah Solar<br>Energy LLC           | solar<br>photovoltaic   | 150              | T25          |
| 20         | Illinois—Big River Solar                      | solar<br>photovoltaic | 75               | IL3          | 49         | Texas——Cranell Wind<br>Farm LLC              | onshore wind turbine    | 110              | T26          |
| 21         | Nevada——Dodge Flat                            | solar<br>photovoltaic | 100              | NV1          | 50         | Texas——El Algodon Alto<br>Wind Farm, LLC     | onshore wind turbine    | 101              | T27          |
| 22         | Nevada——Fish Springs                          | solar<br>photovoltaic | 50               | NV2          | 51         | Texas——Lacy Creek Wind<br>Energy Center      | onshore wind turbine    | 151              | T28          |
| 23         | Nevada——Eagle Shadow<br>Mountain Solar Farm   | solar<br>photovoltaic | 150              | NV3          | 52         | Texas——Azure Sky Wind<br>Project, LLC Hybrid | onshore wind turbine    | 176              | T29          |
| 24         | Texas——Big Star Solar,<br>LLC (Hybrid)        | solar<br>photovoltaic | 100              | T1           | 53         | Texas——Appaloosa Run<br>Wind                 | onshore wind turbine    | 86               | T30          |
| 25         | Texas——Helena Wind                            | onshore wind turbine  | 125              | T2           | 54         | Texas——Aktina Solar                          | solar<br>photovoltaic   | 250              | T31          |
| 26         | Texas——Blackjack Creek<br>Wind Farm           | onshore wind turbine  | 120              | Т3           | 55         | Texas——Western Trail<br>Wind, LLC            | onshore wind turbine    | 367              | T32          |
| 27         | Texas——Sparta Solar                           | solar<br>photovoltaic | 125              | T4           | 56         | Virginia—–Skipjack Solar<br>Center           | solar<br>photovoltaic   | 88               | V1           |
| 28         | Texas—Brazoria West                           | solar<br>photovoltaic | 100              | T5           | 57         | Virginia——Fort Powhatan<br>Solar             | solar<br>photovoltaic   | 75               | V2           |
| 29         | Texas——IP Radian, LLC                         | solar<br>photovoltaic | 150              | Т6           | 58         | Virginia——Maplewood<br>Solar                 | solar<br>photovoltaic   | 60               | V3           |

planned renewable installations through bitcoin mining. Our initial policy recommendation is to explore the potential for flexible approaches to decarbonization that incorporate unconventional and innovative applications such as cryptocurrency mining. Crypto operations such as bitcoin mining offer economically favorable opportunities for numerous planned renewable installations spread across different

counties. This systematic approach highlights the potential of blockchain applications like bitcoin to have a positive impact on energy system operations and sustainability by serving as a shock absorber in the volatile energy market. Shock absorber in the volatile energy market. Along similar lines, bitcoin mining could be the means to use surplus renewable power generation and reduce yearly curtailments. Therefore, policymakers and funding agencies should en-

Table 3. Parameters Used in the Optimization Modeling Framework

| parameters                     | value   | unit       |
|--------------------------------|---------|------------|
| ACHP35                         | 300,000 | \$/unit    |
| $AC^{Miner61}$                 | 3395    | \$/unit    |
| COP <sup>24</sup>              | 1.5     |            |
| $hf^{32}$                      | 0.38    |            |
| opfachp <sup>62</sup>          | 0.00207 | \$/kW h    |
| opfacsolar <sup>63</sup>       | 22.64   | \$/kW year |
| opfacwind <sup>63</sup>        | 43      | \$/kW year |
| $P_{ m MAX}^{ m HP}{}^{ m 32}$ | 1000    | kW h       |
| $P_{ m MIN}^{ m HP~32}$        | 0       | kW h       |
| $P_{ m MAX}^{ m Miner33}$      | 3.25    | kW h       |
| $P_{ m MIN}^{ m Miner33}$      | 0       | kW h       |
| $R^{36}$                       | 6.25    |            |
| sHP <sup>64</sup>              | 0.242   |            |
| sMiner <sup>64</sup>           | 0       |            |
| $v_{\rm cin}^{-38}$            | 2       | m/s        |
| $v_{\rm cout}^{38}$            | 25      | m/s        |
| $v_{\rm r}^{38}$               | 11      | m/s        |
| $\mu^{	ext{PV}37}$             | 0.25    |            |
|                                |         |            |

courage future investments in renewable power generation, as well as explore the potential for added profitability during the precommercial operation of planned installations. Accordingly, by adopting measures to promote domestic energy production, we can reduce the potential risks of price volatility and supply disruption in the global energy market. Moreover, the added economic benefits generated by crypto operations can help attract private investment into the renewable energy sector, providing a much-needed boost to the development of renewable energy infrastructure. As a result, the overall costs of renewable energy systems can be reduced, increasing their accessibility to the general public.

The bitcoin industry predominantly operates on gridpowered miners in the current practice, hence, associated with a staggering carbon footprint. Correspondingly, the impact of cryptoassets on energy policies is a growing concern, with the demand for bitcoin driving energy-intensive mining operations. Some states, like New York, have passed legislation to ban cryptocurrency mining operations that utilize fossil-based energy sources.<sup>54</sup> While legislative actions like these hamper the growth of fossil-heavy crypto operations, it is equally essential to make cleaner mining operations costeffective. Instead of limiting the growth of the industry, it is more practical to use clean energy sources for bitcoin mining. Accordingly, our second policy recommendation is incentivizing crypto operations based on cleaner energy sources through carbon credits. These carbon credits could be issued for the avoided emissions based on crypto operations using planned renewable installations. As an illustration, the Biden administration implemented a US \$85 credit for each metric ton of carbon dioxide captured and stored to widen the use of negative emission technologies.<sup>55</sup> Likewise, incremental income generated through crypto operations facilitated by carbon credits during the period prior to grid integration of renewable infrastructure could serve as an effective risk reduction mechanism. Additionally, the allocation of carbon credits can also drive investment into research and development aimed at reducing the energy consumption of crypto operations, leading to further innovations in the field. As a result, integrating bitcoin mining with planned renewable

installations can attain combined positive effects on climate change mitigation, improved renewable power capacity, and additional profits during precommercial operation.

Our final recommendation is to enhance location-specific renewable energy penetration through crypto operations. From a policy standpoint, it is important to realize that the intrinsic value of any cryptocurrency operation rests in its actual monetary worth. The findings of this study show that we can generate additional profits before any renewable installation supplies power to the grid. Subsequently, the generated profits should be pumped back into renewable infrastructure development. This strategy would ultimately lead to a "virtuous cycle" for incrementing renewable infrastructure. The positive feedback loop could lead to renewable infrastructure development in locations different from its origin. Similarly, the type of facility developed for renewable installations could also vary from the original plan if the crypto industry experiences another "bull run". In the case of a dramatic surge in bitcoin prices, some installations can be exclusively allocated for crypto mining, generating the monetary support required to expedite the development of other planned installations at different locations. This approach of using the profits generated from crypto operations to fund renewable energy development could be an effective way to have a positive impact on the renewable energy transition of the country and reduce the dependence on fossil fuels.<sup>56</sup> Moreover, we can generate green jobs in the renewable energy sector and contribute to the growth of the local economy. To ensure the success of the proposed approach, it is essential to have supportive policies in place that incentivize the growth of renewable energy and its integration with crypto operations.

Although the findings of this study indicate that bitcoin mining presents innovative opportunities in utilizing surplus renewable energy from planned renewable installations and facilitating energy transition, it is also imperative to acknowledge the broader concerns associated with it. Bitcoin mining continues to be highly energy-intensive due to the adopted consensus algorithm.<sup>57</sup> The annual energy consumption of bitcoin mining stands at 115 TW h, equivalent to the power consumption of The Netherlands.<sup>58</sup> Based on this energy consumption, previous studies have pointed out the significant climate impact stemming from bitcoin due to the power supply from nonrenewable sources. 27,28 Moreover, accurate data on the percentage of bitcoin mining that is off the fossildependent power grids are challenging to obtain, as the industry is constantly evolving, and mining operations can be secretive or transient. Apart from the climate impact of bitcoin mining, it can affect several other environmental impact indicators, such as metal depletion.<sup>59</sup> Accordingly, it becomes crucial to consider the impact of bitcoin on the environment beyond energy use. For example, bitcoin is always associated with an e-waste problem. In the current state of mining hardware, they become obsolete after roughly every 2 years due to continuous advancements in the energy efficiency of miners and have no use beyond bitcoin mining. The annualized e-waste generated from bitcoin mining could amount to 10,948 t.

## CONCLUSIONS

The transition toward renewable energy has emerged as a global priority but is often hindered by challenges, such as the lack of efficient energy storage solutions and the economic risks faced by investors. A major obstacle for new renewable

Table 4. Prominent Output Variables, Including Profit (\$M), Number of Miners ( $N^{\text{Miner}}$ ), Number of Heat Pumps ( $N^{\text{HP}}$ ), and Utilization Percentage (UTL) for the Different Planned Renewable Installations Using Bitcoin Mining to Gain Added Profits during Precommercial Operation

| sr. no. | profit (\$M) | $N^{ m Miner}$ | $N^{ m HP}$ | UTL  | sr. no. | profit (\$M) | $N^{ m Miner}$ | $N^{ m HP}$ | UTL  |
|---------|--------------|----------------|-------------|------|---------|--------------|----------------|-------------|------|
| 1       | 0.69         | 974.00         | 2.00        | 0.32 | 30      | 0.39         | 395.00         | 1.00        | 0.40 |
| 2       | 0.93         | 1176.00        | 2.00        | 0.30 | 31      | 0.52         | 504.00         | 1.00        | 0.40 |
| 3       | 0.69         | 974.00         | 2.00        | 0.32 | 32      | 1.75         | 1677.00        | 3.00        | 0.40 |
| 4       | 1.81         | 2352.00        | 4.00        | 0.31 | 33      | 1.76         | 1764.00        | 3.00        | 0.22 |
| 5       | 1.13         | 1176.00        | 2.00        | 0.25 | 34      | 2.25         | 2352.00        | 4.00        | 0.23 |
| 6       | 0.69         | 974.00         | 2.00        | 0.32 | 35      | 2.77         | 2940.00        | 5.00        | 0.23 |
| 7       | 0.97         | 1176.00        | 2.00        | 0.29 | 36      | 1.62         | 1764.00        | 3.00        | 0.24 |
| 8       | 0.96         | 1176.00        | 2.00        | 0.30 | 37      | 1.16         | 1111.00        | 2.00        | 0.40 |
| 9       | 1.62         | 1764.00        | 3.00        | 0.26 | 38      | 1.34         | 1710.00        | 3.00        | 0.27 |
| 10      | 1.81         | 2352.00        | 4.00        | 0.31 | 39      | 1.29         | 1176.00        | 2.00        | 0.39 |
| 11      | 2.17         | 2352.00        | 4.00        | 0.26 | 40      | 0.77         | 588.00         | 1.00        | 0.34 |
| 12      | 1.69         | 1764.00        | 3.00        | 0.29 | 41      | 1.05         | 1022.00        | 2.00        | 0.40 |
| 13      | 2.13         | 2352.00        | 4.00        | 0.31 | 42      | 1.20         | 1145.00        | 2.00        | 0.40 |
| 14      | 1.69         | 1764.00        | 3.00        | 0.29 | 43      | 1.62         | 1764.00        | 3.00        | 0.24 |
| 15      | 0.74         | 588.00         | 1.00        | 0.26 | 44      | 3.23         | 3528.00        | 6.00        | 0.24 |
| 16      | 0.76         | 588.00         | 1.00        | 0.26 | 45      | 2.22         | 1764.00        | 3.00        | 0.35 |
| 17      | 0.32         | 440.00         | 1.00        | 0.24 | 46      | 1.30         | 1661.00        | 3.00        | 0.27 |
| 18      | 0.20         | 459.00         | 1.00        | 0.22 | 47      | 0.66         | 588.00         | 1.00        | 0.19 |
| 19      | 0.28         | 588.00         | 1.00        | 0.22 | 48      | 1.94         | 2352.00        | 4.00        | 0.27 |
| 20      | 0.49         | 588.00         | 1.00        | 0.22 | 49      | 0.79         | 588.00         | 1.00        | 0.33 |
| 21      | 1.72         | 1764.00        | 3.00        | 0.28 | 50      | 0.74         | 588.00         | 1.00        | 0.35 |
| 22      | 0.84         | 1068.00        | 2.00        | 0.33 | 51      | 1.06         | 1029.00        | 2.00        | 0.40 |
| 23      | 2.60         | 2940.00        | 5.00        | 0.31 | 52      | 1.26         | 1176.00        | 2.00        | 0.40 |
| 24      | 1.26         | 1629.00        | 3.00        | 0.27 | 53      | 0.62         | 586.00         | 1.00        | 0.40 |
| 25      | 0.87         | 588.00         | 1.00        | 0.29 | 54      | 3.23         | 3528.00        | 6.00        | 0.24 |
| 26      | 0.84         | 588.00         | 1.00        | 0.30 | 55      | 2.65         | 2352.00        | 4.00        | 0.38 |
| 27      | 1.62         | 1764.00        | 3.00        | 0.24 | 56      | 0.62         | 588.00         | 1.00        | 0.17 |
| 28      | 1.26         | 1629.00        | 3.00        | 0.27 | 57      | 0.54         | 588.00         | 1.00        | 0.20 |
| 29      | 1.94         | 2352.00        | 4.00        | 0.27 | 58      | 0.43         | 558.00         | 1.00        | 0.23 |

projects was the underutilization of assets until they supplied power to the grid. Correspondingly, with the escalating climate concerns associated with the ongoing state of bitcoin mining operations, it was crucial to investigate ways to use this popular demand for bitcoin as an aid toward a sustainable and climatefriendly future. Thus, in this work, we investigated the potential of bitcoin to support the planned renewable installations in the U.S. using added profitability during the precommercial phase. With the help of this novel contribution, we could leverage the demand for bitcoin to benefit the energy transition rather than aggravating the existing challenges. The findings indicated that bitcoin mining, an activity often criticized due to its energy-intensive nature, could serve as a bridge to foster investments in renewable energy. Bitcoin mining proved profitable in all of the examined planned installations, and by adopting this approach, investors could generate economic returns from otherwise unutilized assets. Simultaneously, this strategy could address the climate impact of conventional bitcoin mining operations, which rely on fossildominant grids. Therefore, integrating bitcoin mining with planned renewable installations could enhance the economic potential of renewable projects during their precommercial operation phase and correspondingly mitigate the climate challenges tied to traditional mining practices. Thus, this work emphasizes bitcoin mining as a compelling alternative for policymakers and investors with regard to power utilization from planned renewable installations.

## APPENDIX

Tables 1–4 depict the additional information used in the study, including the list of notations, characteristics for the planned renewable installations, parameters used in the optimization modeling framework, and prominent output variables obtained for each planned installation.

## AUTHOR INFORMATION

## **Corresponding Author**

Fengqi You — Systems Engineering, Cornell University, Ithaca, New York 14853, United States; Robert Frederick Smith School of Chemical and Biomolecular Engineering, Cornell University, Ithaca, New York 14853, United States; orcid.org/0000-0001-9609-4299; Phone: +1 (607) 255-1162; Email: fengqi.you@cornell.edu; Fax: +1 (607) 255-9166

## **Authors**

ı

Apoorv Lal — Systems Engineering, Cornell University, Ithaca, New York 14853, United States

Jesse Zhu — Department of Chemical & Biochemical Engineering, The University of Western Ontario, London, Ontario N6A 3K7, Canada; orcid.org/0000-0001-7749-8917

Complete contact information is available at: https://pubs.acs.org/10.1021/acssuschemeng.3c05445

#### **Notes**

The authors declare no competing financial interest.

## ACKNOWLEDGMENTS

This material is based upon the work supported by the National Science Foundation (NSF) under grant no. 1643244.

## REFERENCES

- (1) Nakamoto, S. Bitcoin: A Peer-To-Peer Electronic Cash System; available at SSRN 3440802, 2008.
- (2) Kay Lup, A. N.; Soni, V.; Keenan, B.; Son, J.; Taghartapeh, M. R.; Morato, M. M.; Poya, Y.; Montañés, R. M. Sustainable energy technologies for the Global South: challenges and solutions toward achieving SDG 7. *Environ. Sci.: Adv.* 2023, 2, 570–585.
- (3) Zhao, N.; Zhang, H.; Yang, X.; Yan, J.; You, F. Emerging information and communication technologies for smart energy systems and renewable transition. *Adv. Appl. Energy* **2023**, *9*, 100125.
- (4) Zhao, N.; You, F. The growing metaverse sector can reduce greenhouse gas emissions by 10 Gt CO2e in the united states by 2050. *Energy Environ. Sci.* **2023**, *16*, 2382–2397.
- (5) Cheung, J. C.-S. Vaccination: keep records secure with blockchain. *Nature* **2021**, *590* (7846), 389–390.
- (6) Ahmed, S.; Broek, N. t. Blockchain could boost food security. *Nature* **2017**, *550* (7674), 43.
- (7) Hoy, A. Q. Emerging scientific technologies help defend human rights. *Science* **2018**, *361* (6405), 859–860.
- (8) Taskinsoy, J. Bitcoin Nation: The World's New 17th Largest Economy; available at SSRN 3794634, 2021.
- (9) Chalmers, D.; Fisch, C.; Matthews, R.; Quinn, W.; Recker, J. Beyond the bubble: Will NFTs and digital proof of ownership empower creative industry entrepreneurs? *J. Bus. Ventur. Insights* **2022**, *17*, No. e00309.
- (10) Mallouli, F.; Khelifi, N.; Hellal, A.; Ferjani, E.; Gmach, I.; Chaabane, N.; Amami, R.; Amami, R. Cryptocurrency bounced back based on cryptography technology during the COVID-19 pandemic. In 2021 International Conference on Computational Science and Computational Intelligence (CSCI); IEEE, 2021; pp 609–614.
- (11) Wang, C. Different GARCH model analysis on returns and volatility in Bitcoin. *Data Sci. Finance Econ.* **2021**, *1* (1), 37–59.
- (12) Hayes, A. What Happens to Bitcoin After All 21 Million Are Mined? https://www.investopedia.com/tech/what-happens-bitcoin-after-21-million-mined/ (accessed March 16, 2023).
- (13) UNFCCC The Paris Agreement. https://unfccc.int/process-and-meetings/the-paris-agreement (accessed March 16, 2023).
- (14) Larkin, A.; Kuriakose, J.; Sharmina, M.; Anderson, K. What if negative emission technologies fail at scale? Implications of the Paris Agreement for big emitting nations. *Clim. Policy* **2018**, *18* (6), 690–714.
- (15) DeConto, R. M.; Pollard, D.; Alley, R. B.; Velicogna, I.; Gasson, E.; Gomez, N.; Sadai, S.; Condron, A.; Gilford, D. M.; Ashe, E. L.; Kopp, R. E.; Li, D.; Dutton, A. The Paris Climate Agreement and future sea-level rise from Antarctica. *Nature* **2021**, *593* (7857), 83–89.
- (16) Hall, S. These charts show record renewable energy investment in 2022. https://www.weforum.org/agenda/2022/07/global-renewable-energy-investment-iea/ (accessed March 27, 2023).
- (17) Wehrmann, B. Germany to spend 200 billion euros on energy transition in independence push. https://www.cleanenergywire.org/news/germany-spend-200-billion-euros-energy-transition-independence-push (accessed March 27, 2023).
- (18) Chiu, D. The East Is Green: China's Global Leadership in Renewable Energy. https://www.csis.org/east-green-chinas-global-leadership-renewable-energy (accessed March 27, 2023).
- (19) Zhao, N.; You, F. New York State's 100% renewable electricity transition planning under uncertainty using a data-driven multistage adaptive robust optimization approach with machine-learning. *Adv. Appl. Energy* **2021**, *2*, 100019.

- (20) Thomassen, G.; Van Dael, M.; Van Passel, S.; You, F. How to assess the potential of emerging green technologies? Towards a prospective environmental and techno-economic assessment framework. *Green Chem.* **2019**, *21* (18), 4868–4886.
- (21) Kim, K.-T.; Lee, D.-J.; Park, S.-J. Evaluation of R&D investments in wind power in Korea using real option. *Renewable Sustainable Energy Rev.* **2014**, *40*, 335–347.
- (22) Gong, J.; You, F. Sustainable design and synthesis of energy systems. *Curr. Opin. Chem. Eng.* **2015**, *10*, 77–86.
- (23) Guillén-Gosálbez, G.; You, F.; Galán-Martín, A.; Pozo, C.; Grossmann, I. E. Process systems engineering thinking and tools applied to sustainability problems: current landscape and future opportunities. *Curr. Opin. Chem. Eng.* **2019**, *26*, 170–179.
- (24) Niaz, H.; Liu, J. J.; You, F. Can Texas mitigate wind and solar curtailments by leveraging bitcoin mining? *J. Cleaner Prod.* **2022**, *364*, 132700.
- (25) Bastian-Pinto, C. L.; Araujo, F. V. d. S.; Brandão, L. E.; Gomes, L. L. Hedging renewable energy investments with Bitcoin mining. *Renewable Sustainable Energy Rev.* **2021**, *138*, 110520.
- (26) Stoll, C.; Klaaßen, L.; Gallersdörfer, U. The Carbon Footprint of Bitcoin. *Joule* **2019**, 3 (7), 1647–1661.
- (27) Krause, M. J.; Tolaymat, T. Quantification of energy and carbon costs for mining cryptocurrencies. *Nat. Sustainability* **2018**, *1* (11), 711–718.
- (28) Jiang, S.; Li, Y.; Lu, Q.; Hong, Y.; Guan, D.; Xiong, Y.; Wang, S. Policy assessments for the carbon emission flows and sustainability of Bitcoin blockchain operation in China. *Nat. Commun.* **2021**, *12* (1), 1938.
- (29) Mora, C.; Rollins, R. L.; Taladay, K.; Kantar, M. B.; Chock, M. K.; Shimada, M.; Franklin, E. C. Bitcoin emissions alone could push global warming above 2 C. *Nat. Clim. Change* **2018**, 8 (11), 931–933.
- (30) Blair, N.; Dobos, A. P.; Freeman, J.; Neises, T.; Wagner, M.; Ferguson, T.; Gilman, P.; Janzou, S. System Advisor Model, Sam 2014.1. 14: General Description; National Renewable Energy Laboratory (NREL): Golden, CO, United States, 2014.
- (31) Weather Data & API. https://www.visualcrossing.com/(accessed July 1, 2023).
- (32) Niaz, H.; Shams, M. H.; Liu, J.; You, F. Correction: Mining bitcoins with carbon capture and renewable energy for carbon neutrality across states in the USA. *Energy Environ. Sci.* **2022**, *15* (10), 4426.
- (33) Realtime mining hardware profitabilitylASIC Miner Value. https://www.asicminervalue.com/ (accessed March 15, 2023).
- (34) PoW-PoC Coins. https://poolbay.io/coins (accessed March 27, 2023).
- (35) Cox, J.; Belding, S.; Lowder, T. Application of a novel heat pump model for estimating economic viability and barriers of heat pumps in dairy applications in the United States. *Appl. Energy* **2022**, *310*, 118499.
- (36) de Vries, A. Bitcoin boom: What rising prices mean for the network's energy consumption. *Joule* **2021**, *5* (3), 509–513.
- (37) Masuko, K.; Shigematsu, M.; Hashiguchi, T.; Fujishima, D.; Kai, M.; Yoshimura, N.; Yamaguchi, T.; Ichihashi, Y.; Mishima, T.; Matsubara, N.; Yamanishi, T.; Takahama, T.; Taguchi, M.; Maruyama, E.; Okamoto, S. Achievement of More Than 25% Conversion Efficiency With Crystalline Silicon Heterojunction Solar Cell. *IEEE J. Photovolt.* **2014**, *4* (6), 1433–1435.
- (38) Shams, M. H.; Shahabi, M.; Kia, M.; Heidari, A.; Lotfi, M.; Shafie-Khah, M.; Catalão, J. P. Optimal operation of electrical and thermal resources in microgrids with energy hubs considering uncertainties. *Energy* **2019**, *187*, 115949.
- (39) Tian, X.; You, F. Carbon-neutral hybrid energy systems with deep water source cooling, biomass heating, and geothermal heat and power. *Appl. Energy* **2019**, 250, 413–432.
- (40) Wichser, C.; Klink, K. Low wind speed turbines and wind power potential in Minnesota, USA. *Renewable Energy* **2008**, 33 (8), 1749–1758.

- (41) Adeh, E. H.; Good, S. P.; Calaf, M.; Higgins, C. W. Solar PV Power Potential is Greatest Over Croplands. *Sci. Rep.* **2019**, 9 (1), 11442.
- (42) Hepbasli, A.; Kalinci, Y. A review of heat pump water heating systems. *Renewable Sustainable Energy Rev.* **2009**, *13* (6–7), 1211–1229.
- (43) Zade, M.; Myklebost, J.; Tzscheutschler, P.; Wagner, U. Is Bitcoin the Only Problem? A Scenario Model for the Power Demand of Blockchains. *Front. Energy Res.* **2019**, *7*, 21.
- (44) Lal, A.; You, F. Climate concerns and the future of nonfungible tokens: Leveraging environmental benefits of the Ethereum Merge. *Proc. Natl. Acad. Sci. U.S.A.* **2023**, *120* (29), No. e2303109120.
- (45) Schilling, L.; Uhlig, H. Some simple bitcoin economics. *J. Monet. Econ.* **2019**, *106*, 16–26.
- (46) Bitpro We buy GPU Mining Rigs. https://bitproit.com/(accessed March 25, 2023).
- (47) Bitcoin ASIC GPU FPGA Cryptocurrency Miners Recycling & Disposal Service. https://www.beyondsurplus.com/bitcoin-asic-gpufpga-cryptocurrency-miners-recycling-disposal-service.html (accessed March 25, 2023).
- (48) Rosenow, J.; Gibb, D.; Nowak, T.; Lowes, R. Heating up the global heat pump market. *Nat. Energy* **2022**, *7* (10), 901–904.
- (49) Odukomaiya, A.; Woods, J.; James, N.; Kaur, S.; Gluesenkamp, K. R.; Kumar, N.; Mumme, S.; Jackson, R.; Prasher, R. Addressing energy storage needs at lower cost via on-site thermal energy storage in buildings. *Energy Environ. Sci.* **2021**, *14* (10), 5315–5329.
- (50) EPA Develop New Power Purchase Agreement. https://www.epa.gov/lmop/develop-new-power-purchase-agreement (accessed March 24, 2023).
- (51) Cory, K.; Canavan, B.; Koenig, R. Power Purchase Agreement Checklist for State and Local Governments; National Renewable Energy Laboratory (NREL): Golden, CO, United States, 2009.
- (52) Andoni, M.; Robu, V.; Flynn, D.; Abram, S.; Geach, D.; Jenkins, D.; McCallum, P.; Peacock, A. Blockchain technology in the energy sector: A systematic review of challenges and opportunities. *Renewable Sustainable Energy Rev.* **2019**, *100*, 143–174.
- (53) California-ISO Managing Oversupply. http://www.caiso.com/informed/Pages/ManagingOversupply.aspx (accessed March 27, 2023).
- (54) Gronewold, A. Hochul signs partial cryptocurrency mining ban into New York law. https://www.politico.com/news/2022/11/22/cryptocurrency-mining-ban-new-york-00070613 (accessed December 13, 2023).
- (55) Dindi, A.; Coddington, K.; Garofalo, J. F.; Wu, W.; Zhai, H. Policy-driven potential for deploying carbon capture and sequestration in a fossil-rich power sector. *Environ. Sci. Technol.* **2022**, *56* (14), 9872–9881
- (56) Zhao, N.; You, F. Can renewable generation, energy storage and energy efficient technologies enable carbon neutral energy transition? *Appl. Energy* **2020**, 279, 115889.
- (57) Velický, M. Renewable Energy Transition Facilitated by Bitcoin. ACS Sustainable Chem. Eng. 2023, 11 (8), 3160-3169.
- (58) Milunovich, G. Assessing the connectedness between Proof of Work and Proof of Stake/Other digital coins. *Econ. Lett.* **2022**, 211, 110243.
- (59) Kohler, S.; Pizzol, M. Life Cycle Assessment of Bitcoin Mining. *Environ. Sci. Technol.* **2019**, 53 (23), 13598–13606.
- (60) de Vries, A. Renewable Energy Will Not Solve Bitcoin's Sustainability Problem. *Joule* **2019**, *3* (4), 893–898.
- (61) Antminer S19 Series Profitability and Price Guide. https://hashrateindex.com/blog/antminers19-profitability-price/#:~:text=Antminer-S19-Specification&text=The-95-TH-model-has,terahash-(J%2FTH) (accessed January 1, 2023).
- (62) Popovski, E.; Fleiter, T.; Santos, H.; Leal, V.; Fernandes, E. O. Technical and economic feasibility of sustainable heating and cooling supply options in southern European municipalities-A case study for Matosinhos, Portugal. *Energy* **2018**, *153*, 311–323.
- (63) Vimmerstedt, L.; Akar, S.; Mirletz, B.; Sekar, A.; Stright, D.; Augustine, C.; Beiter, P.; Bhaskar, P.; Blair, N.; Cohen, S. Annual

Technology Baseline: The 2022 Electricity Update; National Renewable Energy Laboratory (NREL): Golden, CO, United States, 2022.

(64) Depreciation Calculator. https://www.calculator.net/

depreciation calculator. https://www.calculator.depreciation-calculator.html (accessed March 27, 2023).